Tapered Connectors - Minimum Lengths

For tapered connectors where one spigot is larger than another, there are minimum connector lengths that apply. Simply select the diameter of each spigot on the chart below (the blue numbers) and the corresponding black number gives the minimum connector length that applies.

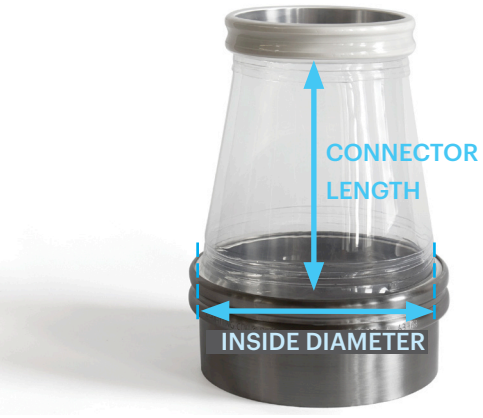

											X	25.59	650
										X	100	23.62	600
									X	100	150	21.65	550
								X	100	150	200	19.69	500
							X	100	150	200	250	17.72	450
						X	100	150	200	250	300	15.75	400
					X	100	150	200	250	350	350	13.78	350
				X	100	150	200	250	300	350	350	11.81	300
			X	100	150	200	250	300	350	350	400	9.84	250
		X	100	150	200	250	300	350	350	400	450	7.87	200
	X	100	150	200	250	300	350	350	400	450	500	5.91	150
X	100	100	200	200	250	300	350	400	450	500	550	4.92	125
100	100	150	200	250	300	350	350	400	450	500	550	3.94	100
3.94	4.92	5.91	7.87	9.84	11.81	13.78	15.75	17.72	19.69	21.65	23.62	25.59	(INCHES)	(MM)
100	125	150	200	250	300	350	400	450	500	550	600	650	(MM)	DIA

NOTE: Connector length shown above (black numbers) is given in mm.

ARL PRODUCTS, LLC | EMAIL: info@arlproducts.com | WEB: arlproducts.com | PH: 281-203-8577